

GRIP THAT'S GENTLE TO LAWN

Nokian Excavator is a special tyre for excavator use. Combining grip, stability and low surface pressure, it is your ideal choice for parks, yards and muddy surfaces. And when you drive on road, its low vibration means smoother transits. When you need grip that's gentle to lawn, Nokian Excavator is your tyre of choice.

TECHNICAL SPECIFICATIONS


Nokian Excavator

Size	LI/SS	PR	TT/TL	Rim	Permitted rims	Width	Diameter	TD	Loaded static radius	Rolling circumference	Max. inflation pressure	Product code
											kPa	
600/50-22.5	165A8	20	TL	AG20.00		600	1150	40	524	3506	450	T445633
600/50-22.5	173A8	24	TL	AG20.00		600	1150	40	523	3531	600	T445604
650/45-22.5	175A8	24	TL	AG22.00	AG20.00	650	1150	40	527	3521	600	T445605
710/40-22.5	173A8	24	TL	AG24.00		700	1150	40	526	3506	550	T445606

IMPORTANT!

Only use Nokian Excavator tyres with **rims certified by their manufacturer for required load capacity, speed and inflation pressure.** For further information consult our technical manual at nokiantyres.com/heavy.

Load capacity IND 40 km/h (A8)

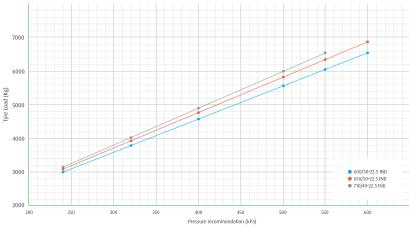

Features

Steel fortified against rocks and stubs

Good self-cleaning properties

Strengthened shoulders

Lug tread for better traction

High air pressure for improved stability

